

MAGIC INDUSTRIAL

Industrial Luminaire

FEATURES

Snap together design.

Continuous raceway and row mounting capability.

Surface, stem, or chain mountable.

Uses T8 or T12 lamps.

Steel housing and ends with white enamel finish.

Embossed cross-ribbed reflectors for added rigidity.

Parabolic reflector design.



APPLICATION

Warehouse Aisles

Warehouse Areas

Manufacturing Areas

Garage and Workshops

Utility Area

Large Storage Rooms

ICC232EBDV	T-8	48"	120/277
ICC259EBDV	T-8	96"	120/277
ICC96432DV	T-8	96"	120/277
ICC296120	T-12	96"	120
ICC296277	T-12	96"	277

APPLICATION FEATURES

Economy grade, fluorescent industrial fixture. For use in indoor applications where low cost, but industrial grade ruggedness is required. Available in 4 and 8 foot lengths. Converts to raceway for continuous row mounting.

CONSTRUCTION

Single piece reflector on non-tandem units. Knockouts are provided for flexible conduit attachment. Die and brake formed, code gauge pre-painted white cold rolled steel.

MOUNTING

Knock-outs are provided for stem mounting. Mounting holes are provided. Optional V (Speedy) hangers accommodate chain (not provided).

FINISH

Pre-painted high reflectance white.

OPTICS

Standard reflectors are solid, embossed for rigidity, and are coated with a durable, high reflectance white finish. Optional reflectors are available with a slotted upright component.

ELECTRICAL

All electrical components are CSA or UL approved. Lamp holders provided ensure positive lamp retention. Lamp holders with rotary locks are available. Standard ballasts are electromagnetic, energy saving where required. See Product Selection for optional ballasts. The standard voltage is 120V, 60 Hz, or as specified. Other Voltage and frequency ratings are also available. Sufficient knock-outs are provided on the back and ends for connections and through wiring.

APPROVALS

Approved to CSA and UL standards. (UL, or equivalent, marked only when specified.)

OPTIONS


- Slotted full reflector, painted white.
- Electronic ballasts and dimming ballasts, see Product Selection.
- Polycarbonate rotary lock lampholders.
- Individual & custom packaging (select units only).

OPTIONAL ADDERS


- Fuse holder.
- Pull chain switch
- Aligner clips, for row mounting.
- Speedy Hangers.

MAGIC INDUSTRIAL

Series Dimensions

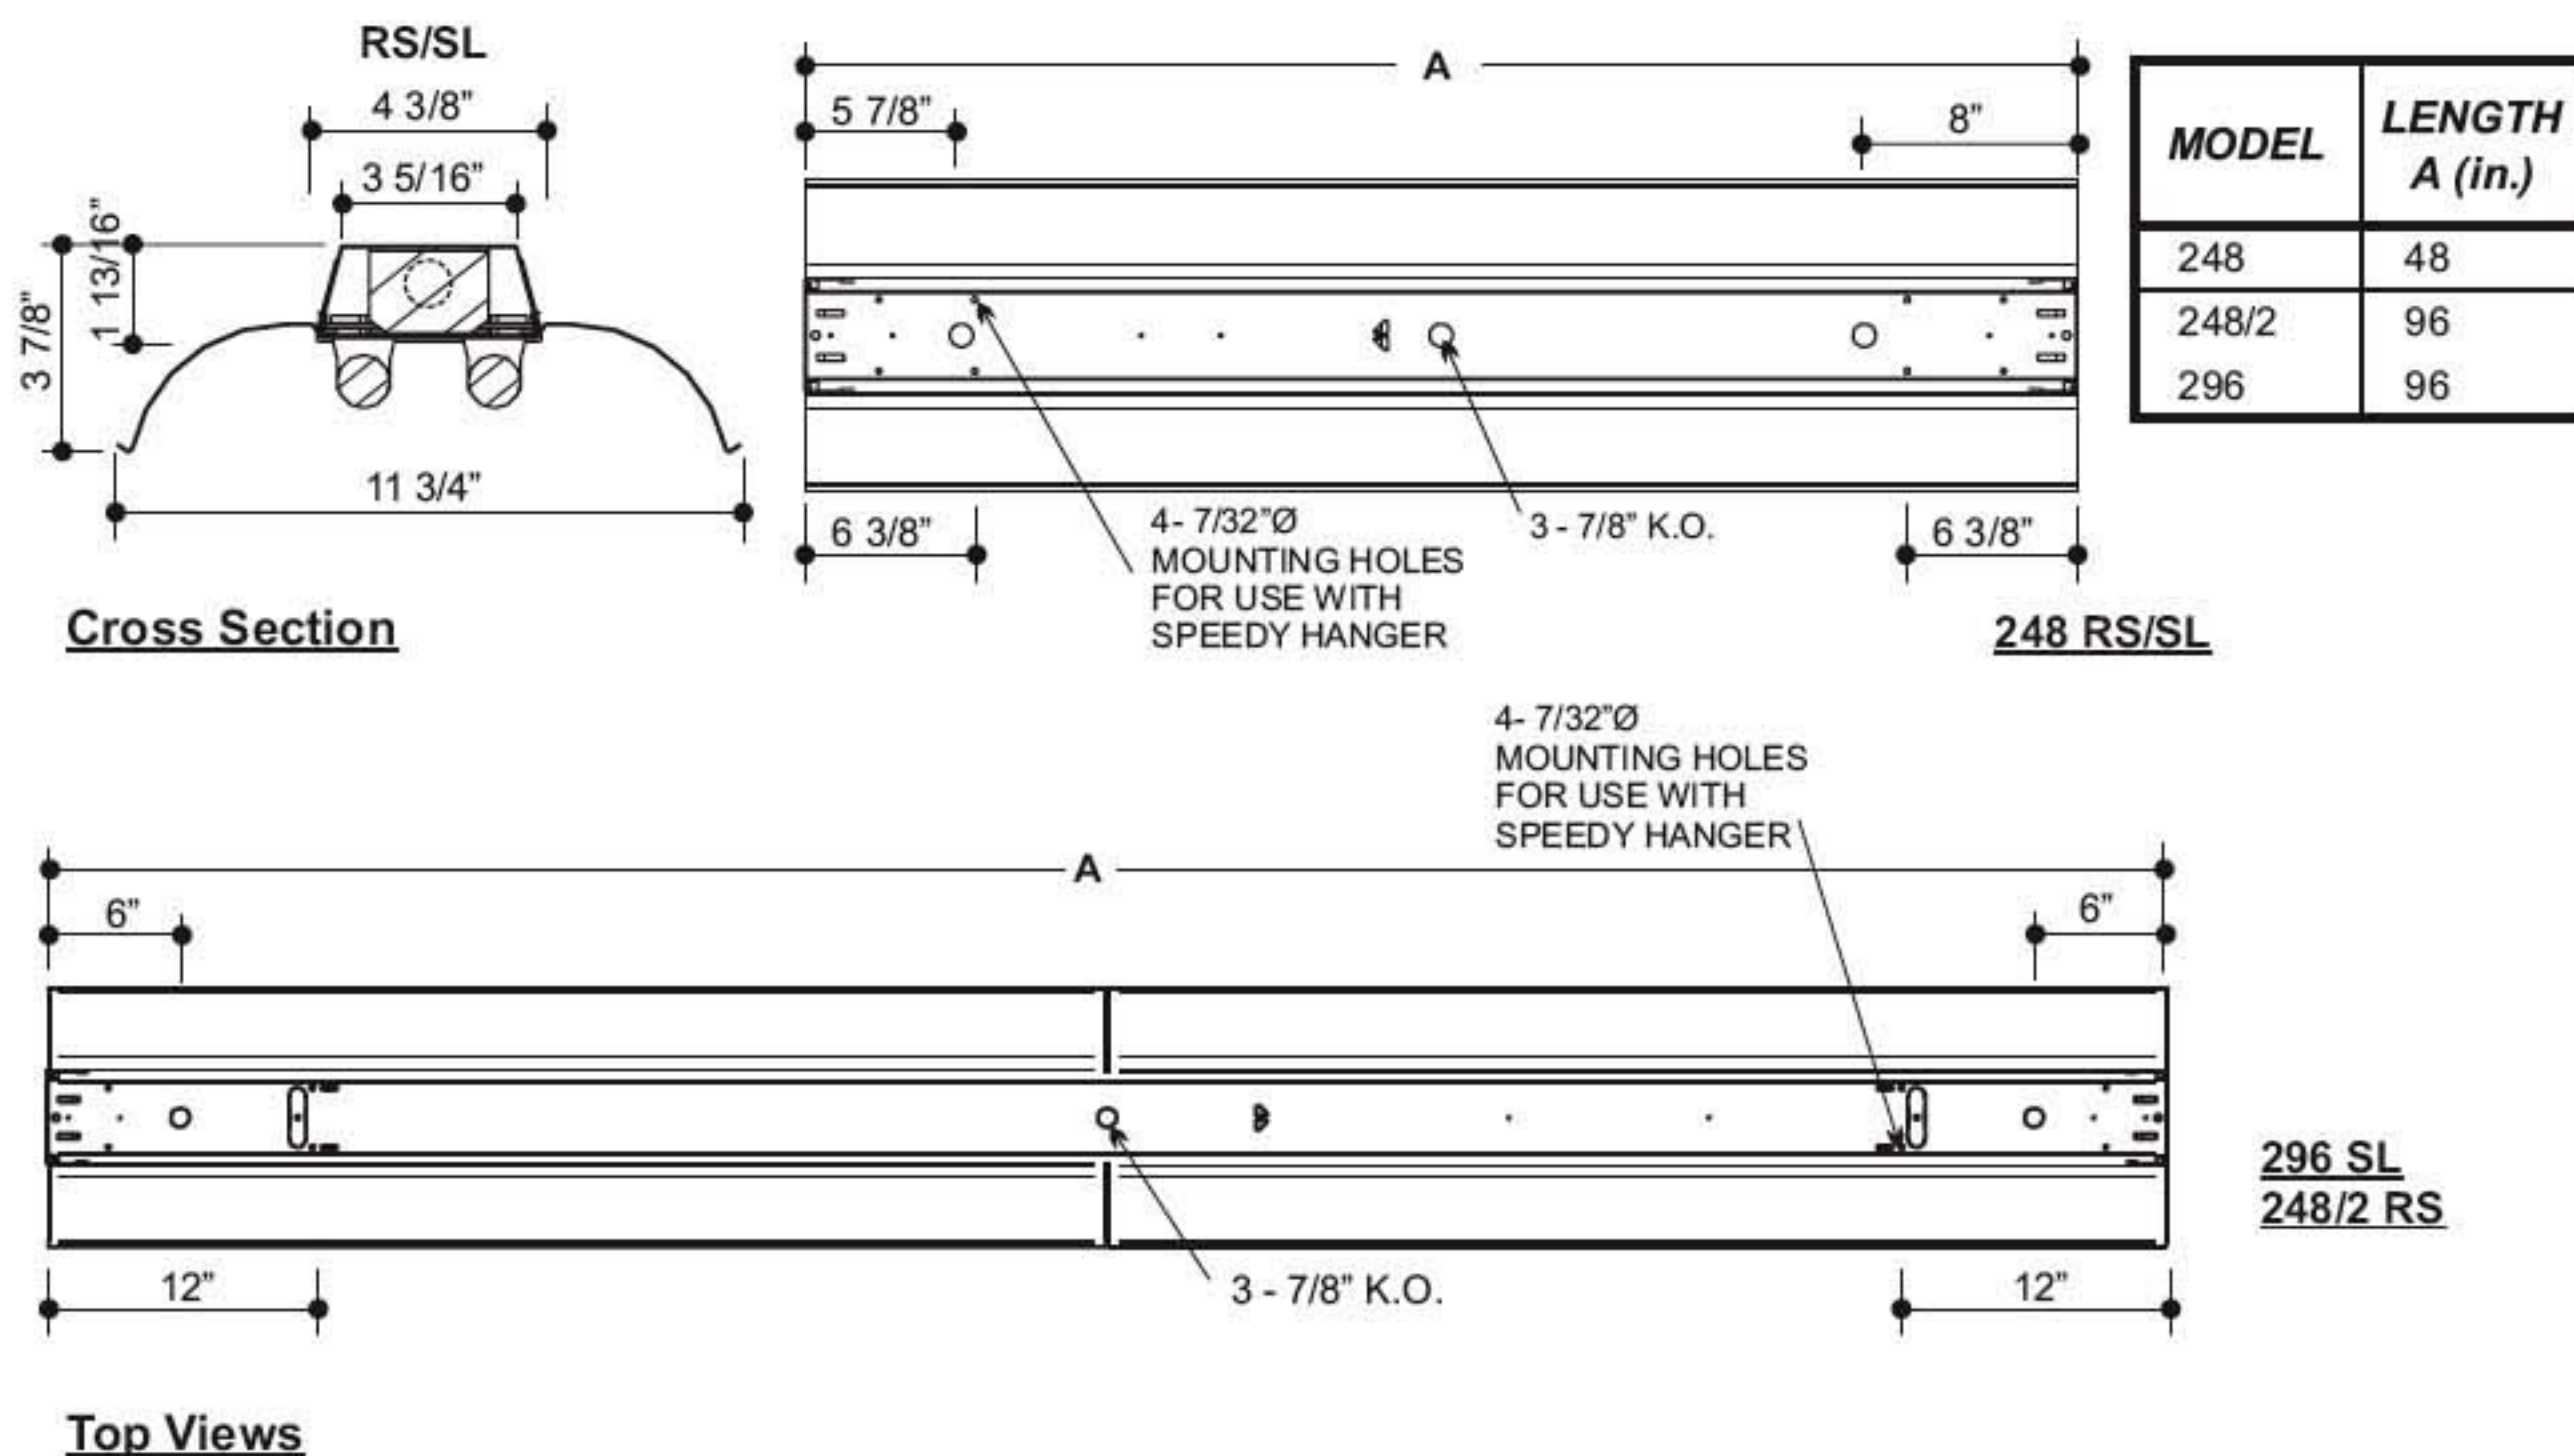

Product Key

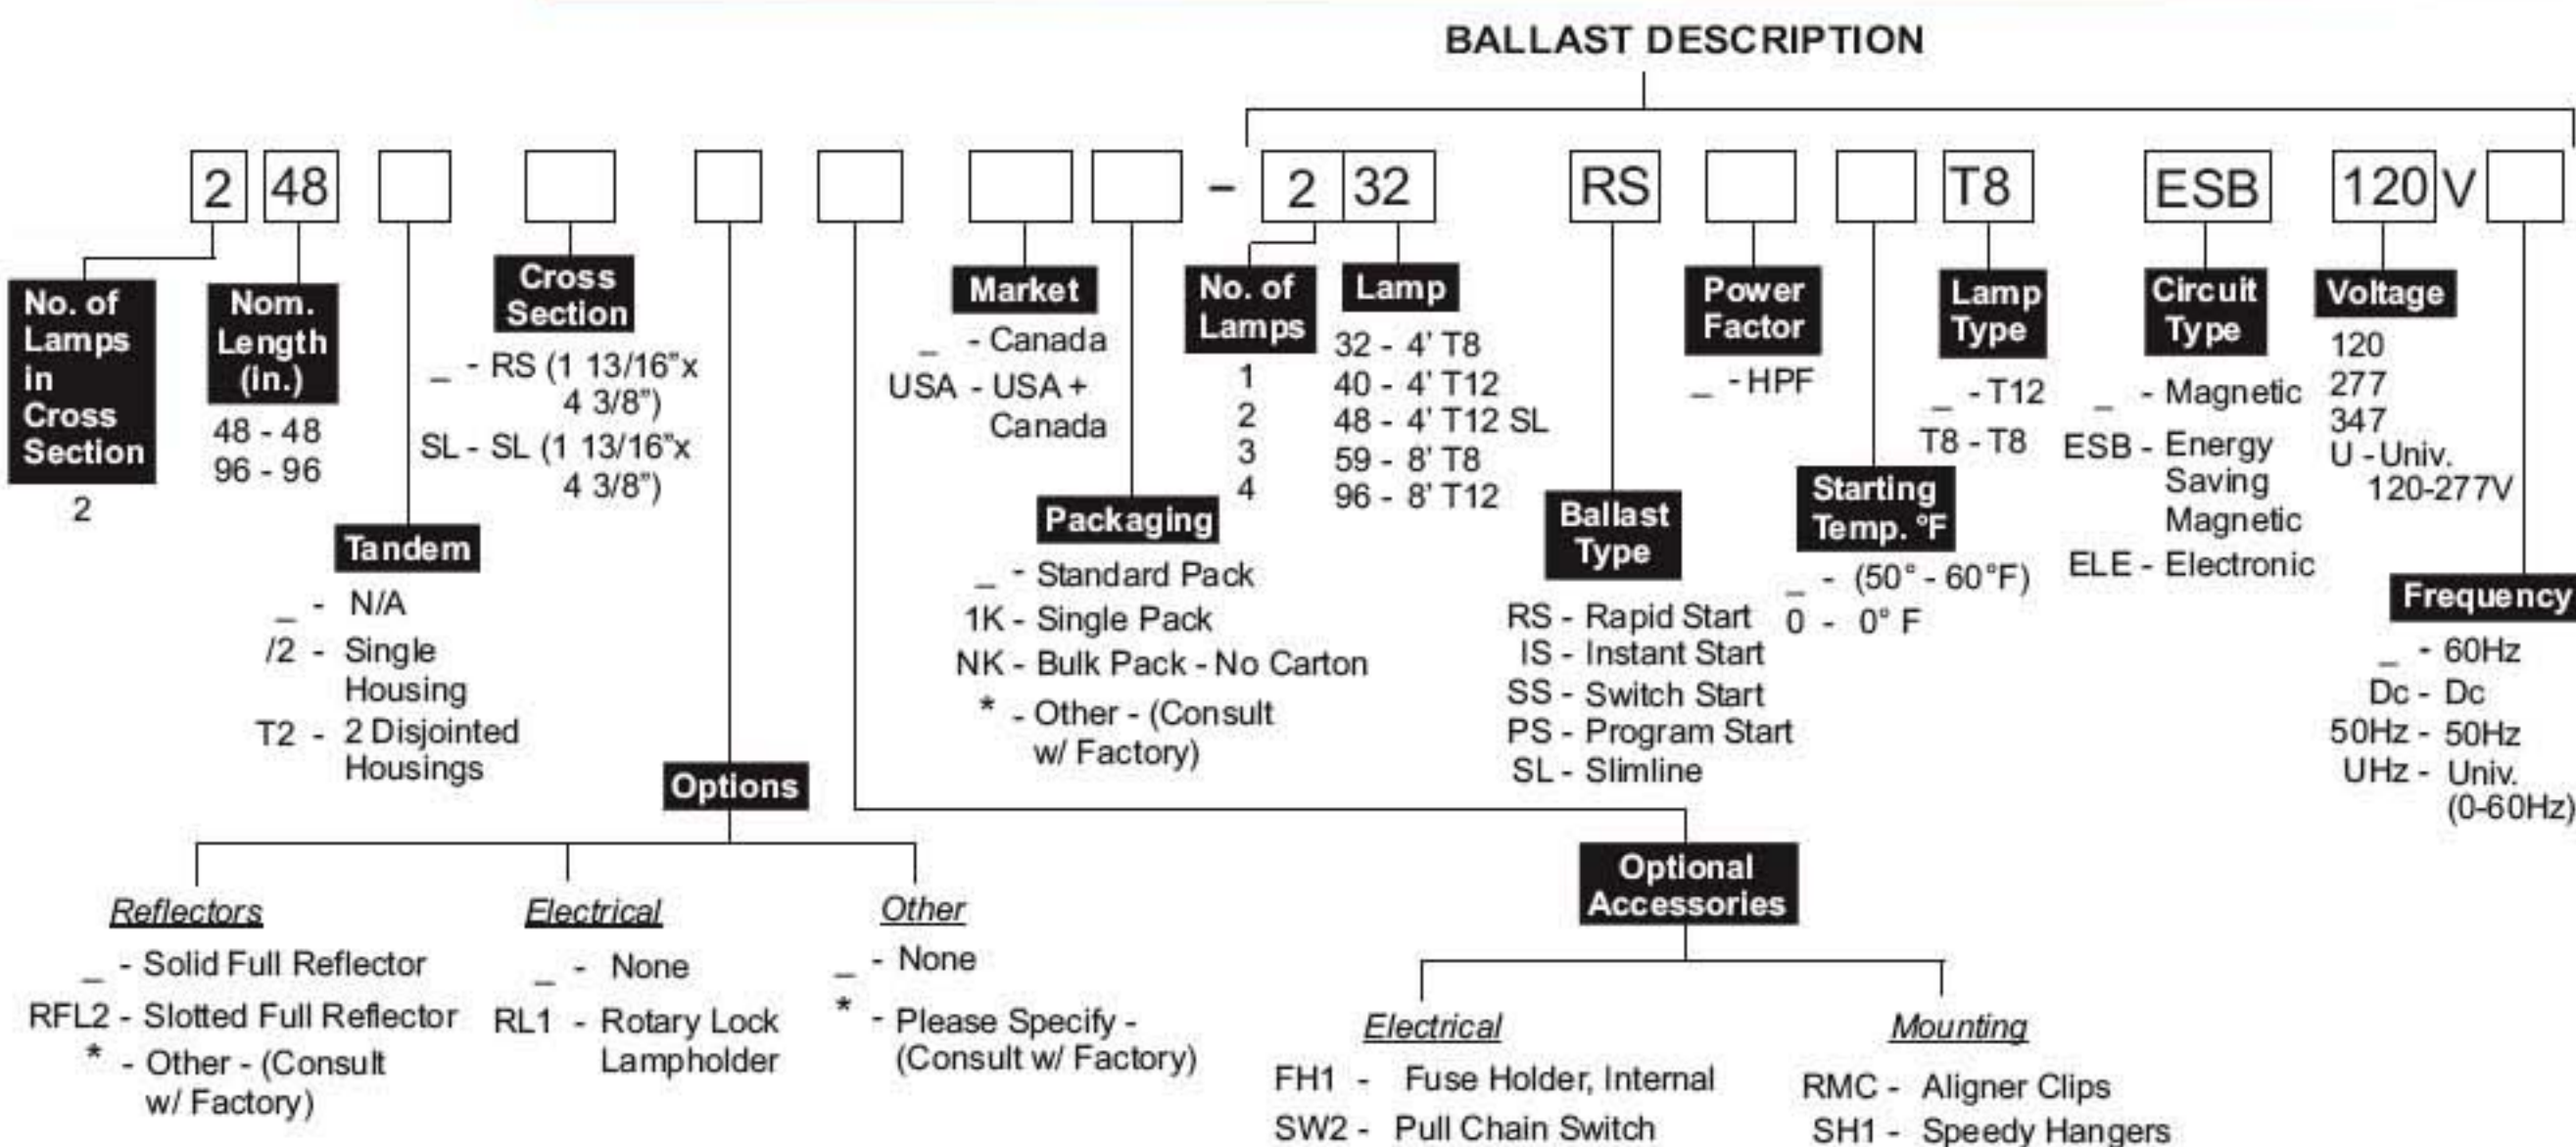

Example:

248 - 232 RS T8 ESB 120V

Certain configurations may not be available